RC Controlled Power Supply

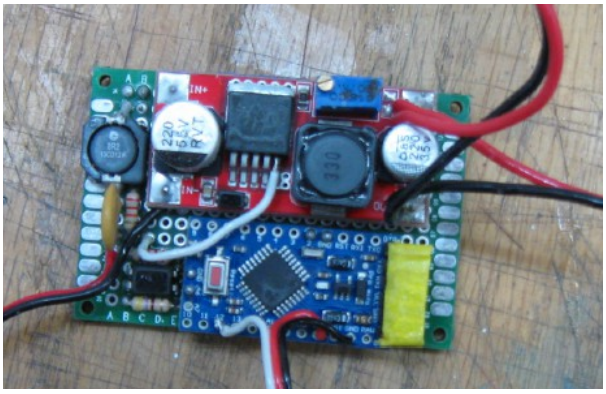

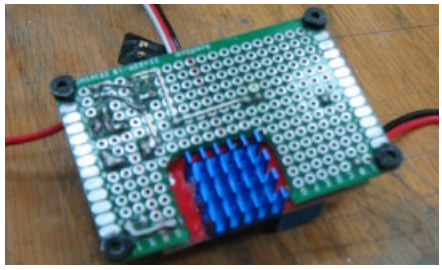

Power supply enabled/disabled by RC servo signal

- **Power Input Voltage** **5V to 42V (2S to 10S LIPO)**
- **Output Power** **35W max**
- **Power Output Current** **3A max**
- **Power Output Voltage** **Settable with trimmer**
- **Minimal Vin-Vout** **3V**
- **Resettable Fuse** **1.7A disconnect current after 10s**
- **ON/OFF Switch limit** **1.7ms**
- **Logic Voltage** **5V**
- **Logic Current** **10mA**
- **Weight** **31g**
- **Low RF noise**
- **Watter protection by coating**
- **Servo signal optoisolated from Power input**
- **Power input short cicuit protected by resettable fuse**

System Interconnection

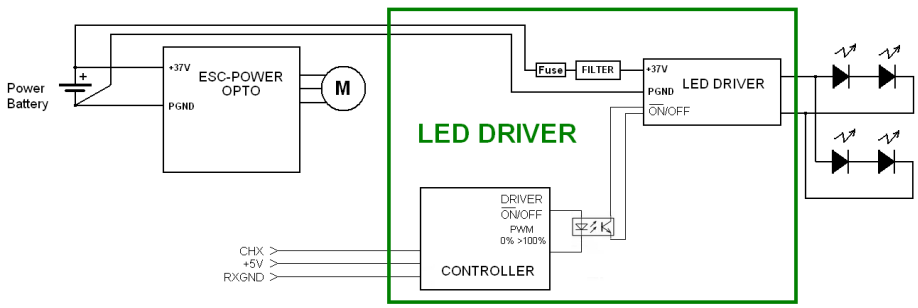

Design and Manufactured by YOARDUTECH
Contact: info@yoardutech.com